



## 1078 Series 4 1/2" Square Low Profile Door Activator Switches

SENSORS & SWITCHES



#1078-H (Anodized Blue Aluminum Face Plate with Engraved Legend)



#1078-P (Anodized Black Aluminum Face Plate with Engraved Legend)

### Product Name

1078 Series 4 1/2" Square Low Profile Door Activator Switches

### Manufacturer

MS Sedco  
8701 Castle Park Drive  
Indianapolis, IN 46256  
Phone: (800) 842-2545  
(317) 842-2545  
Fax: (800) 849-3387  
(317) 849-3387  
Email: [custsvc@mssedco.com](mailto:custsvc@mssedco.com)  
[www.mssedco.com](http://www.mssedco.com)

### Product Description

#### BASIC USE

The 1078 Series low profile door activator switches are designed to provide reliable activation of any automatic door.

The 1078 Series features a 4 1/2" square formed stainless steel back plate with a 2" x 3" active face plate mounted flush within the backplate. Designed to be low profile, the 1078 projects only 1/4" from the wall. It fits a double gang electrical box with no adapter necessary. A surface mounting box is also available.

Each unit is quality built utilizing heavy gauge stainless steel, aircraft quality screws, durable finishes and the most reliable microswitch in the industry.

### Technical Data

- 2" x 3" All Active Face Plate
- 4 1/2" x 4 1/2" Formed Stainless Steel Back Plate
- 1/4" Projection From Wall
- UL Listed "Cherry Switch", SPDT, Mom., 15 Amp @ 125V AC
- Fits 2-gang Electrical Box or MS Sedco #1214 Surface Mounting Box
- Radio Control Versions Available

### DIMENSIONS

See Reverse

### APPLICABLE STANDARDS

American National Standards Institute (ANSI) - Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.19.

### APPROVALS

UL (Cherry Switch)

### Installation

The 1078 Series low profile switch is easy to install.

#### Hardwired Applications:

Mount a standard 2-gang electrical box at the desired location. Connect the necessary signal wires to the appropriate switch contacts (COM and N.O. are standard). Secure the switch to the electrical box.

#### Wireless Applications:

Mount a TX-323 Transmitter and surface mount box in the desired location. Program the desired security code and connect the transmitter wire leads to the COM and N.O. switch contacts. Attach the switch to the surface box.

#### Custom Applications:

The 1078 Series Switch can be customized in a variety of ways. Virtually any legend can be placed on the face plate as well as custom colors or finishes. Contact the factory for pricing.

### Availability & Cost

#### AVAILABILITY

Available internationally from manufacturer's authorized distributors; contact MS Sedco for the location of nearest distributor.

#### COST

Cost information on MS Sedco products is available from the manufacturer's authorized distributors.

## 1078 Series 4 1/2" Square Low Profile Door Activator Switches

SENSORS & SWITCHES

### Warranty

MS Sedco, Inc. guarantees this product to be free from manufacturing defects for three years from date of installation. Unless MS Sedco is notified of the date of installation, the warranty will be in effect for three years from the date of shipment from our factory. If, during the first three years, this product fails to operate and has not been tampered with or abused, the unit can be returned prepaid to the factory and be repaired free of charge. After three years, the unit will be repaired for a nominal service charge. **Limited warranty is in lieu of all other warranties, expressed or implied, including any implied warrantability of merchantability, no representative or person is authorized to assume for MS Sedco any other liability in connection with the sale of our products. All warranties are limited to the duration of this written limited warranty. In no event shall MS Sedco be liable for any special, incidental, consequential or other damage arising from any unclaimed breach of warranty as to its products or services.**

### Maintenance

MS Sedco recommends that all maintenance and adjustments be performed by an AAADM Certified Technician.

### Technical Services


MS Sedco's staff of factory trained sales and service personnel offer design assistance and technical

support. Local distributors are also available to assist in selecting appropriate devices for specific uses and to provide onsite installation.

### Filing Systems

- Sweet's
- Additional product information is available from the manufacturer upon request.

### DIMENSIONS

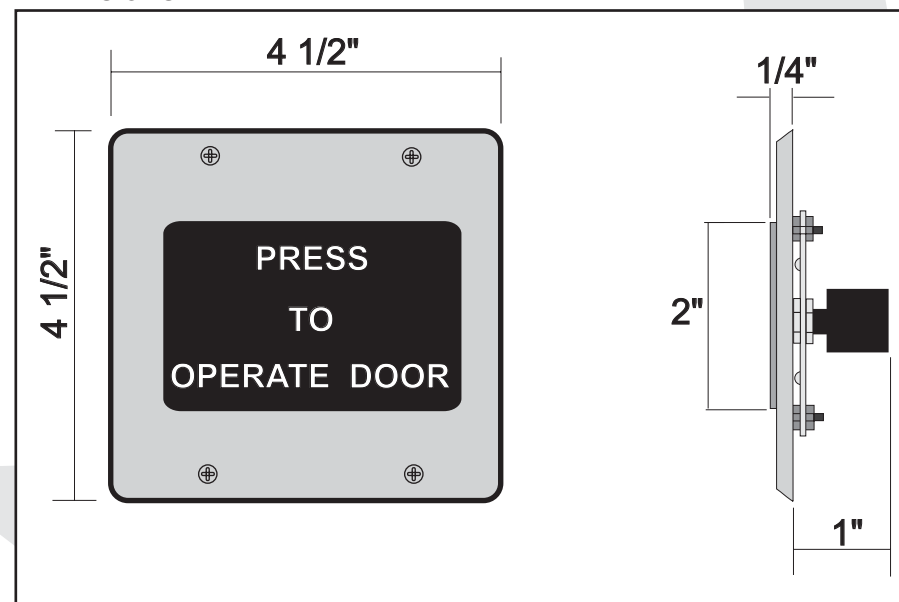

102003