



730 Series Combination Keyswitches and Door Activator Switches

SENSORS & SWITCHES



#730-619H



#730-619HSS



#730-619P

**Product Name**

730 Series Combination Keyswitches and Door Activator Switches

**Manufacturer**

MS Sedco  
8701 Castle Park Drive  
Indianapolis, IN 46256  
Phone: (800) 842-2545  
(317) 842-2545  
Fax: (800) 849-3387  
(317) 849-3387

Email: [custsvc@mssedco.com](mailto:custsvc@mssedco.com)  
[www.mssedco.com](http://www.mssedco.com)

**Product Description**

**BASIC USE**

The 730 Series combination keyswitches and door activator switches are designed to provide reliable and secure activation of any low voltage device.

These unique devices are two switches in one. The keyswitch and the door activation switch can be set up to work independently of each other or the keyswitch can turn the door activator switch on and off, providing an economical way to secure the door activation switch after hours.

The keyswitch is available with either a momentary or maintained contact switch. The door activator switch utilizes the 619 series face plates. The 730 series combination switch can also be used with the TX-323 series radio transmitter.

**Technical Data**

- Keyswitch Operates By 1 1/8"-1 1/4" Mortised Cylinder

- Wall Switch Utilizes a 1 11/16" x 4 1/2" All Active Face Plate
- 4 1/2" x 4 1/2" Stainless Steel Back Plate
- Keyswitch—UL Listed DPDT Toggle Switch (Maintained or Momentary) 1 Amp Rated
- Wall Switch—UL Listed Cherry Switch, SPDT, Mom., 15 Amp @ 125V AC
- Fits Single-gang Electrical Box or MS Sedco #1214 Surface Mounting Box
- Special Finishes: US3, US4, US10, US10B, US32
- Radio Control Versions Available
- Mortised Cylinder Available Separately

**DIMENSIONS**

See Reverse

**APPLICABLE STANDARDS**

American National Standards Institute (ANSI) - Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.19 / A156.10.

**APPROVALS**

UL (Microswitches)

**Installation**

The 730 combination keyswitch is easy to install. It mounts directly to any 2-gang wall box or a #1214 surface mount box. Wiring is made simple with a plugable wiring harness (consult installation instructions for specific wiring directions).

**Availability & Cost**

**AVAILABILITY**

Available internationally from manufacturer's authorized

**730 Series Combination Keyswitches and Door Activator Switches**

SENSORS & SWITCHES

distributors; contact MS Sedco for the location of nearest distributor.

**COST**

Cost information on MS Sedco products is available from the manufacturer's authorized distributors.

**Warranty**

MS Sedco, Inc. guarantees this product to be free from manufacturing defects for one year from date of installation. Unless MS Sedco is notified of the date of installation, the warranty will be in effect for one year from the date of shipment from our factory. If, during the first year, this product fails to operate and has not been tampered with or abused, the unit can be returned prepaid to the factory and be repaired free of charge. After one year, the unit will be repaired for a nominal service charge. **Limited warranty is in lieu of all other warranties, expressed or implied, including any implied warrantability of merchantability. No representative or person is authorized to assume for MS Sedco any other liability in connection with the sale of our products. All warranties are limited to the duration of this written limited warranty. In no event shall MS Sedco be liable for any special, incidental, consequential or other damage arising from any unclaimed breach of warranty as to its products or services.**

**Maintenance**

MS Sedco recommends that all maintenance and adjustments be performed by an AAADM Certified Technician.


**Technical Services**

MS Sedco's staff of factory trained sales and service personnel offer design assistance and technical support. Local distributors are also available to assist in selecting appropriate devices for specific uses and to provide onsite installation.

**Filing Systems**

- Sweet's
- Additional product information is available from the manufacturer upon request

**DIMENSIONS**

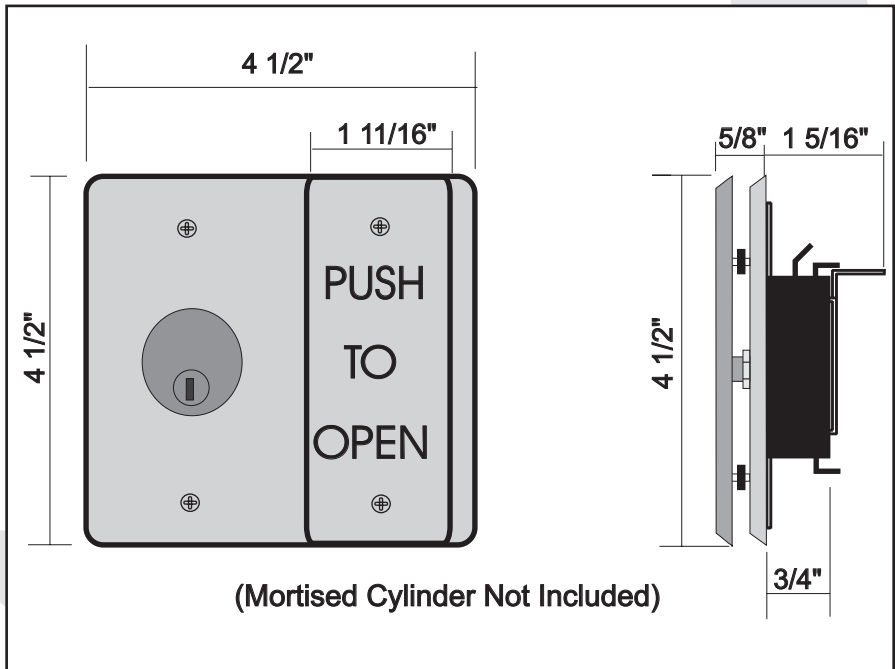

102003